

23 SL CUDDY


HARDWARE & EQUIPMENT - STANDARD

- Bilge blower**, 12v electric
- Bilge pump**, 1500 gph w/automatic float switch
- Boarding ladder**, aft, stainless steel retractable
- Bow eye**, stainless steel
- Canvas top storage**
- Cleats**, Perko[®], through-bolted, life-time warranty
- Fuel fill**, aft
- Fuel tank**, non-corrosive, keel-mounted
- Horn**, 12v, electric flush mount
- Ignition safety** interlock switch w/lanyard
- Navigation lights**, fwd w/removable anchor light aft
- Railings**, stainless steel, through-bolted
- Steering system**, Teleflex[®] rack & pinion
- Steering wheel**, Momo[®] w/padded grip
- Swim platform**, integrated, w/retractable ladder
- Trailer tie-down eyes**, stainless steel, through-bolted
- Windshield system**, Aldon Opti-view[™], tempered safety glass, anodized aluminum frame

CANVAS (See Page 66)

- Convertible top
- Side curtains
- (Mooring cover optional from dealer)

NOTES

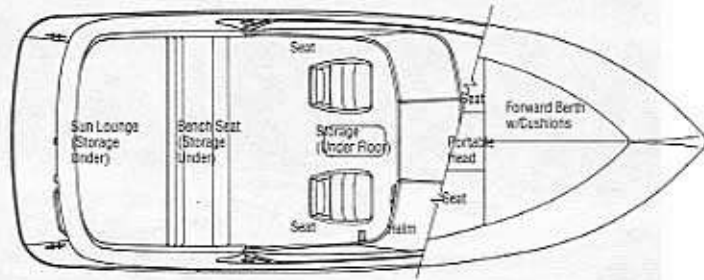

SPECIFICATIONS	STANDARD	METRIC
Centerline	23' 0"	7.01 m
Beam	8' 6"	2.59 m
Dry weight	3300 lbs	1497 kg
Fuel capacity	61 gal	231 L
Draft: drive up	22"	.56 m
Draft: drive down	35"	.89 m
Bridge clearance	4' 9"	1.45 m
Deadrise	21°	21°

POWER - STANDARD (See Page 58)

Volvo[®] 431 SP 4.3 L V-6

POWER OPTIONAL (See Page 58)

Volvo 572 SP 5.7 L V-8

PERFORMANCE DATA

TIME TO PLANE	3.5 SECONDS
TOP SPEED	49.1 MPH @ 4500 RPM
CRUISE SPEED	28.4 MPH @ 3000 RPM
CRUISE RANGE	182 MILES