



# WALK AROUND

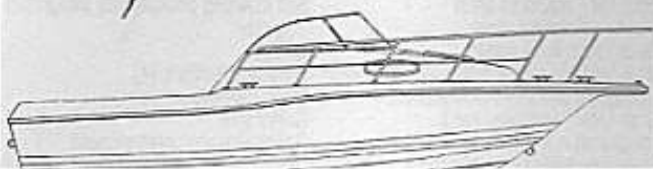

## 24 WALKAROUND

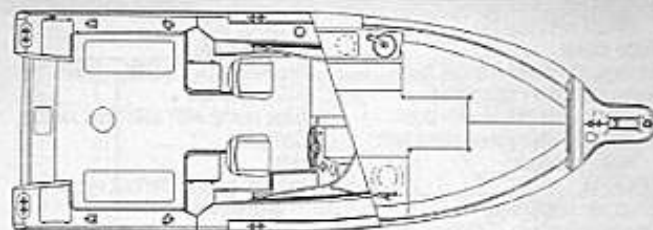

L.O.A. w/ pulpit	24'1" (7.34m)
Hull length	22'3" (6.78m)
Beam	8'4" (2.54m)
Dry weight w/150 O/B (approx.)	3400 lbs. (1542kg)
Fuel capacity (Gas)	99 gal. (374.72L)
Holding tank capacity	12 gal. (45.42L)
Water capacity	9 gal. (34.07L)
Max power @ prop	300 HP (223.7kw)
Deadrise	21°
Draft: up	17" (.43m)
Draft: down	32" (.81m)
Bridge clearance without top	6'0" (1.83m)
Bridge clearance with hardtop	7'8" (2.38m)
Bridge clearance with bimini top	6'11" (2.10m)
Sleeping capacity	2
Headroom	5'3" (1.61m)

### KEY SALES FEATURES

- Full featured walkaround fish boat with stay-aboard family cruising accommodations • V-berth, galley, self contained head compartment with Sealand™ Vacu-Flush and holding tank
- All stainless steel deck hardware thru-bolted
- 100 quart circular livewell raw water washdown system
- In floor fish boxes with overboard drain and hinged lids
- Built-in tackle storage • CE Certifiable (for export)
- Compliant with Coast Guard safety standards
- 5-year structural hull warranty - transferable
- Qualifies for second home tax deduction
- Foam filled, fiberglass encapsulated stringer system

### STANDARD EQUIPMENT

#### HULL & DECK

- Anchor storage
- Bow pulpit with roller and deck pipe
- Bow and stern eyes - stainless steel
- Bow rail - stainless steel - one piece welded
- Cleats - stainless steel
- Hatch - forward deck, opening
- Port lights - port/stbd
- Rod holders (4) - stainless steel flush mount with cap
- Rod storage - under gunwale - port/stbd
- Rub rail - heavy-duty
- Windshield - curved tempered glass

#### COCKPIT

- Beverage holders
- Canvas - bimini top - Sunbrella
- Cockpit bolsters - port/stbd/aft
- Cockpit - self-draining
- Cooler - 72 qt.
- Courtesy lights
- Fish boxes with hinged lids (2) in floor - insulated with overboard drain - port/stbd
- Foot rest - folding aluminum
- Grab rails
- Liner - fiberglass - non-skid for easy maintenance
- Livewell cushions
- Livewell with raw water washdown- lighted - 100 qt. capacity

- Seats - pedestal with cushions - port removable with additional base on bow

#### CABIN

- Door - bi-fold with hatch
- Head - Sealand™ Vacu-Flush with holding tank
- Lighting - 12V
- Sink
- Stove - alcohol single burner
- V-berth converts to seating with dinette table

#### MECHANICAL

- Accessory plug - 12V
- Battery switch
- Bilge pump with auto float switch
- Compass
- Horn
- Ignition - safety interlock system with lanyard
- Instrumentation - tachometer, speedometer, fuel, volts, water pressure, trim
- Navigation lights
- Oil tank storage with remote fill
- Power at helm for electronics
- Pressurized fresh water system with transom shower - 8 gal.
- Propeller - stainless steel
- Steering - hydraulic
- Steering wheel - stainless steel
- Switches - weather resistant
- Trim tabs
- VHF radio with antenna

### OPTIONAL EQUIPMENT

- Dual battery switch with trays
- Half-dive platform with swing down ladder
- Overboard discharge for head
- Pre-rig for OMC (Recommended HP: 175 hp to 225 hp, check for engine availability)
- Stainless steel rub rail insert
- Stereo - Clarion AM/FM CD player with remote control - 4 speakers - weather resistant
- **Canvas Package**
- Side and drop curtains
- Windshield connector
- Windshield wiper - stbd

#### • Hardtop Package

- Hardtop, fiberglass with finished liner, spreader light, rod holders and full canvas enclosure, windshield wiper - stbd

#### • Tournament Edition Package

- Dark blue hullside gelcoat
- Custom graphics
- Custom steering wheel
- Chrome thru hulls

#### • Elite Tournament Edition Pkg

- White hullside gelcoat
- Custom graphics
- Custom steering wheel
- Chrome thru hulls

\* Note: Items in Packages cannot be ordered individually.

### PERFORMANCE DATA - OMC 200 O/B

Time to Plane	2.96 Seconds
Top Speed	46.8 MPH @ 5890 RPM
Cruise Speed	30.8 MPH @ 4000 RPM
Cruise Range	345 Miles
Propeller Size	15" X 17" SST

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted.