




## 210 FISHERMAN

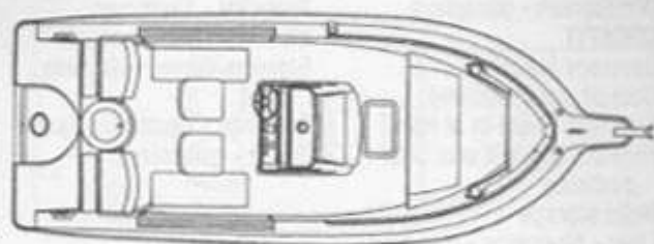

L.O.A.	21'9" (6.63m)
Hull length	20'3" (6.17m)
Beam	8'3" (2.51m)
Dry weight w/135 O/B (approx.)	3200 lbs. (1451.51kg)
Fuel capacity (Gas)	75 gal. (283.8L)
Max power @ prop	225 HP (167.8kw)
Deadrise	19°
Transom angle	15°
Draft: up	15" (.40m)
Draft: down	31" (.79m)
Bridge clearance without top	5'6" (1.67m)
Bridge clearance with T-top	8'4" (2.54m)
Bridge clearance with bimini top	7'10" (2.38m)

### KEY SALES FEATURES

- Bow pulpit with roller and deck pipe
  - Foam filled fiberglass stringer system - composite transom
  - Integrated swim platform
- Compliant with Coast Guard safety standards
- 5-year structural hull warranty - transferable
- All stainless steel deck hardware thru-bolted
  - Insulated fish boxes port and starboard with overboard drains • 27 gallon lighted round baitwell
  - Multiple storage areas

### STANDARD EQUIPMENT

#### HULL & DECK

Anchor locker  
Bow pulpit with roller and deck pipe  
Bow and stern eyes - stainless steel  
Bow rail - stainless steel  
Cleats - stainless steel  
Composite transom  
Rails - stainless steel  
Rod holders - 2 ea. stainless steel flush mount with cap  
Swim platform - integrated  
Transom - full height  
Windscreen - plexiglass

#### COCKPIT

Beverage holders (4)  
Cockpit - self draining  
Fish boxes (11 gal. ea.) - port/stbd - insulated w/overboard drain  
Footrest  
Forward console seat w/ insulated cooler and cushion  
Liner - fiberglass - non-skid for easy maintenance  
Livewell - 27 gal. w/light

Pedestal seats - port/stbd w/cushions  
Gunwale caps w/rod storage port/stbd and toe kick  
Large floor storage forward of console - 10 cu. ft.  
Large storage under forward casting platform - 13.3 cu. ft.

#### MECHANICAL

Accessory plug - 12V  
Bilge pump w/auto float switch  
Compass  
Electronics box - lockable  
Horn  
Ignition - interlock system with lanyard  
Instrumentation - tachometer, fuel, volts, water pressure, trim  
Navigation lights  
Power for electronics at helm  
Propeller - aluminum  
Steering - non-feedback  
Steering wheel - stainless steel  
Switches - weather resistant  
Trailer - galvanized

### OPTIONAL EQUIPMENT

Battery switch - dual with trays  
Bimini Top - Sunbrella  
Canada certification  
CE certification (for export only)  
Cradle  
Heavy duty dive ladder - removable  
Hydraulic steering (required on installations above 150 hp)  
Leaning post seat with storage and rod holders  
Pre-rig for OMC  
(Recommended HP: 130 hp to 225 hp, check for engine availability)  
Raw water washdown  
Stainless steel rub rail insert  
T-top w/spreader light, rod holders and electronics box  
Trim Tabs

#### \* Seating Upgrade

Aft seats - port/stbd with bolsters  
Bow cushion  
Cockpit bolsters - port/stbd  
\* **Tournament Edition Package**  
Dark blue hullside gelcoat  
Custom graphics  
Cockpit bolsters - port/stbd  
Custom steering wheel  
Chrome thru hulls  
\* **Elite Tournament Edition Pkg**  
White hullside gelcoat  
Custom graphics  
Cockpit bolsters - port/stbd  
Custom steering wheel  
Chrome thru hulls

\* Note: Items in Packages cannot be ordered individually.

### PERFORMANCE DATA - SGL 225 OMC

Time to Plane	2.60 Seconds
Top Speed	51.4 MPH @ 5900 RPM
Cruise Speed	34 MPH @ 4000 RPM
Cruise Range	200 Miles
Propeller Size	14-3/4" x 19" Viper Swept

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted.