


## 240 COASTAL

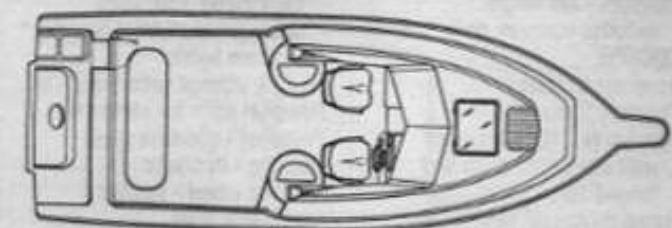

L.O.A. w/ pulpit	25'5" (7.75m)
Hull length	24'0" (7.32m)
Beam	8'6" (2.59m)
Dry weight w/225 O/B (approx.)	4500 lbs. (2041.2kg)
Fuel capacity (Gas)	134 gal. (507.19L)
Max power @ prop	300 HP (223.71kw)
Deadrise	18°
Draft: down	32" (.82m)
Bridge clearance without top	5'8" (1.73m)
Bridge clearance with hardtop	7'11" (2.17m)
Headroom	59" (1.5m)
Sleeping Capacity	2

### KEY SALES FEATURES

- Large cabin with non skid fiberglass sole, with hatch and secure dry storage
- Well-Tech transom - integrated O/B bracket and swim platform
- All stainless steel deck hardware thru-bolted
  - NMMA Certification
- 5-year structural hull warranty - transferable
  - CE Certifiable (for export)
- Fish box - 60" - insulated with hinged lid
- Foam filled, fiberglass encapsulated stringer system

### STANDARD EQUIPMENT

#### HULL & DECK

- Anchor locker
- Bow pulpit with roller and deck pipe
- Bow and transom eyes - stainless steel
- Bow rail - stainless steel - one piece welded
- Cleats - stainless steel
- Rod holders - (4) deck mount
- Rod racks - under gunwale
- Swim platform - integrated with flush mounted ladder
- Transom - full height includes transom door

#### COCKPIT

- Beverage holders
- Bow seat cushion
- Coaming pads port & stbd
- Cockpit - self-draining
- Courtesy lights
- Fish box - 60" insulated with overboard drain and hinged lid
- Liner - fiberglass - non-skid for easy maintenance
- Livewell cushions
- Livewell - with raw water washdown - lighted - 84 qt. capacity
- Rigging station - cutting board - watertight tackle box
- Seats - pedestal with cushions - port/stbd

#### CABIN

- Cabin Lighting - 12 volt
  - Deck hatch opening
  - Head - self contained
  - V-Berth with cushions
- #### MECHANICAL
- Accessory plug - 12V
  - Bilge pump with auto float switch
  - Compass
  - Electronics box - lockable
  - Horn
  - Ignition - safety interlock system with lanyard
  - Instrumentation - tachometer, fuel, volts, water pressure, trim, warning\*
  - Navigation lights
  - Oil tank storage with remote fill
  - Power at helm for electronics
  - Propeller - stainless steel
  - Steering - hydraulic
  - Steering wheel - padded stainless steel
  - Switches/circuit breakers - weather resistant

\*Note: Systems warning gauge not available on Twin Merc 150 Offshore

### OPTIONAL EQUIPMENT

- Bimini Top-Sunbrella
- Cockpit bolsters
- Hardtop - fiberglass with spreader lights and rod holders
- Pre-rig for single OMC
- \* **Optional Package 4**
- Canvas - side and drop curtains and windshield connector
- ✓ Windshield wiper - stbd
- \* **Optional Package 6**
- Battery switch - dual
- Trim tabs
- \* **Optional Package 7**
- ✓ Trim tabs
- (Twin) Two dual battery switches
- ✓ \* **Optional Package 8**
- Full canvas hardtop enclosure
- Windshield wiper
- ✓ \* **Optional Package 10**
- Aft seat - removable - (requires cockpit bolsters)
- Stereo - AM/FM cassette - 2 speakers
- ✓ **Galley Unit**
- Pressure water with sink and transom shower (9 gal.)
- Stove - single burner alcohol

\* Note: Items in Optional Packages cannot be ordered individually

### ENGINE OPTIONS

- \* SGL Merc 225 Offshore O/B
- SGL Merc 225 EFI Offshore O/B
- Twin Merc 150 Offshore O/B
- \*\* Twin Merc 150 Optimax Offshore
- \* SGL OMC Ocean 225 O/B
- Twin OMC Ocean 150 O/B
- \*\* Twin OMC Ocean 150-FFI

All twin engines factory installed

\* Factory installed engine

\*\* As available

Specifications, options, and equipment are subject to change without notice.

### PERFORMANCE DATA - OMC 225 O/B

Time to Plane	3.11 Seconds
Top Speed	47.1 MPH @ 6000 RPM
Cruise Speed	35 MPH @ 4500 RPM
Cruise Range	351 Miles
Propeller Size	15" X 17" OMC SST

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted.