




160 CCF

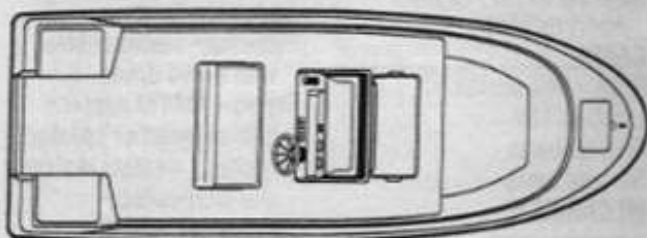

L.O.A.	16'1" (4.9m)
Beam	6'0" (1.83m)
Dry weight w/48 O/B (approx.)	1100 lbs. (453.6kg)
Fuel capacity (Gas)	20 gal. (75.7L)
Max power @ prop	90 HP (67kw)
Deadrise	17°
Draft	10" (.62m)
Bridge clearance without top	4'7" (1.4m)

KEY SALES FEATURES

- Versatile, economical, and practical
 - New Livewell
 - NMMA Certification
- 5-year structural hull warranty - transferable
- Fiberglass stringers • Factory matched trailer
 - Composite transom

STANDARD EQUIPMENT

HULL & DECK

Anchor locker
 Bow and transom eyes - stainless steel
 Foam flotation - level
 Hardware - thru-bolted - stainless steel
 Rail - stainless steel
 Rod holders - stainless steel (2)
 Rub rails - high impact
 Storage - 5 cu. ft. dry bow locker
 Tackle storage
 Windshield - plexiglass

COCKPIT

Forward console seat with cooler (36 qt.)
 Liner - non-skid fiberglass for easy maintenance
 Rod holders on console
 Seat - helm with cooler & reversible back

MECHANICAL

Bilge pump with auto float
 Fuel gauge and tachometer
 Steering wheel - padded/stainless steel
 Switches - weatherproof
 Trailer - galvanized with tie down straps

OPTIONAL EQUIPMENT

Bimini top
 Casting platform cushion
 Compass

Forward cooler seat cushion with back rest
 Livewell - 45 qt. capacity

ENGINE OPTIONS

* Force 50

Merc 75 EL PTO

* OMC 50 SPL

OMC 70 PT&T

*Factory installed engine

Specifications, options, and equipment are subject to change without notice.

PERFORMANCE DATA - OMC 50 SPL

Time to Plane	3.12 Seconds
Top Speed	33.2 MPH @ 5300 RPM
Cruise Speed	23.9 MPH @ 4000 RPM
Cruise Range	113 Miles
Propeller Size	13 3/4" X 17" AL

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s).
 Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted.