

185X I/O BOWRIDER



- Good looks and performance fun for 6 • 3.0 Liter Mercruiser or Volvo sterndrive • European style swim platform with ski tow eye
- Boat, Motor, Trailer, Canvas Package

SPECIFICATIONS	STANDARD	METRIC
Centerline	18' 0"	5.49 m
Beam	7' 2"	2.18 m
Dry weight	2000 lbs	907 kg
Fuel capacity	20 gal	76 L
Draft: drive up	13"	.33 m
Draft: drive down	28"	.71 m
Bridge clearance	3' 7"	1.09 m
Length on trailer	20' 6"	6.99 m
Width on trailer	7' 9"	2.36 m
Deadrise	18°	18°
Max weight capacity	1250 lbs	567 kg
Persons	6 or 900 lbs	6 or 408 kg

PERFORMANCE DATA	Volvo 3.0 GL	Mercury 3.0 LX
Time To Plane	3.46 Seconds	3.5 Seconds
Top Speed	42.4 @ 4500 RPM	45.9 MPH @ 4800 RPM
Cruise Speed	29.4 @ 3250 RPM	30.9 MPH @ 3500 RPM
Cruise Range	93 Miles	90 Miles
GPH	6.0	8.0

STANDARD POWER

Volvo 3.0 GL SX

OPTIONAL POWER

Mercury 3.0 LX

CANVAS

Convertible top

Side curtains

Bow well cover

(Slant back and mooring cover optional from dealer)

NEW FOR '94

Volvo 3.0 GL engine or Mercury 3.0 LX engine option

Canvas top storage

Hinged engine cover

Myco trailer for both fresh and salt water


New graphics and colors

Shifter with push button neutral

Instrumentation, redesigned Faria gauge faces

Lighted bilge pump and blower

185X I/O BOWRIDER - BOAT/MOTOR/TRAILER/CANVAS

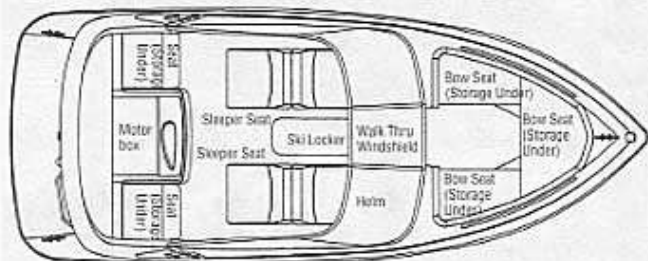

STANDARD MODEL FEATURES

Beverage holders, coolie cup

Canvas top storage

Engine controls, single-lever, with built-in trim and tilt switch

Engine cover, hinged reinforced fiberglass construction with lounge pad

Ice chest, 11 qt. portable

Instrumentation, Faria speedometer, tachometer, voltmeter, fuel, oil pressure, temperature and trim gauge in black non-glare dash console

Sleeper seats, 5-position, convert to lounges

Seats, aft, storage compartments under

Seats, bow area with storage under

Ski tow eye, stainless steel, reinforced, through-bolted

Stereo, AM-FM cassette with all-weather speakers

Storage shelves, under dash consoles

Stowage compartments, upper and lower side panels

Stowage locker, in-floor ventilated, 74" length, with removable carpeting

Ventilation louvers, engine compartment

STANDARD HARDWARE & EQUIPMENT

Bilge blower, 12v electric

Bilge pump, 400 gph with automatic float switch

Boarding ladder, aft, stainless steel retractable

Bow eye, stainless steel

Cleats, Perko, through-bolted, life-time warranty

Fuel fill, aft

Fuel tank, non-corrosive, keel-mounted

Horn, 12v, electric flush mount

Ignition safety interlock switch with lanyard

Navigation lights, fwd with removable anchor light aft

Railings, stainless steel, through-bolted

Steering system, Teleflex rack & pinion

Steering wheel, Momo with padded grip

Swim platform, integrated

Trailer tie-down eyes, stainless steel, through-bolted

Windshield system, Aldon Opti-view, tempered safety glass, anodized aluminum frame

NOTES
