

16 DX O/B BOWRIDER




MODEL FEATURES - STANDARD

- Bench seat**, 3 person, w/storage under
- Beverage holders**, coolie cup
- Engine controls**, Yamaha single-lever w/built-in trim switch
- Ice chest**, Igloo® 11 qt. portable
- Instrumentation**: speedometer, fuel and trim gauge in non-glare dash console
- Seats**, open bow w/cushions
- Ski tow pylon**, three-point, removable, stainless steel
- Stereo**, AM-FM cassette w/all-weather speakers
- Sundeck**, aft, w/storage compartments under

HARDWARE & EQUIPMENT - STANDARD

- Boarding ladder**, aft, stainless steel retractable
- Bow eye**, stainless steel
- Cleats**, Perko®, through-bolted, life-time warranty
- Fuel fill**, aft
- Fuel tank**, non-corrosive, keel-mounted
- Horn**, 12v, electric flush mount
- Ignition safety** interlock switch w/lanyard
- Navigation lights**, fwd w/removable anchor light aft
- Railings**, stainless steel, through-bolted
- Steering system**, Teleflex® rack & pinion
- Steering wheel**, Uflex® w/padded grip
- Swim platform**, integrated
- Trailer tie-down eyes**, stainless steel, through-bolted
- Urethane foam flotation**

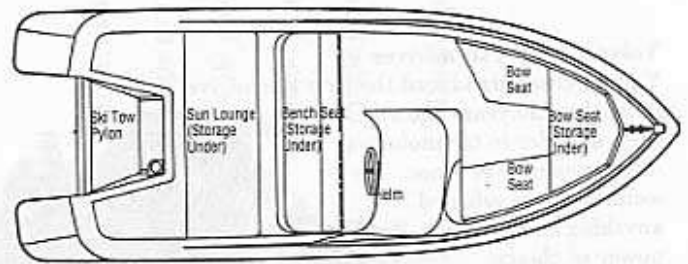

SPECIFICATIONS	STANDARD	METRIC
Centerline	15' 11"	4.85 m
Beam	6' 0"	1.83 m
Dry weight w/engine	1340 lbs	608 kg
Fuel cap	12 gal	45 L
Draft: drive up	11"	.28 m
Draft: drive down	26"	.66 m
Bridge clearance	3' 0"	.91 m
Length on trailer	18' 9"	5.72 m
Width on trailer	6' 6"	1.98 m
Deadrise	16°	16°
Max weight capacity	909 lbs	412 kg
Persons	4 or 600 lbs	4 or 272 kg

POWER - STANDARD (See Page 60)

Yamaha® 3-cylinder, in-line 2 cycle outboard, C series

PERFORMANCE DATA

TIME TO PLANE	3.7 SECONDS
TOP SPEED	42.2 MPH @ 5300 RPM
CRUISE SPEED	31 MPH @ 4000 RPM
CRUISE RANGE	.81 MILES

NOTES
