

## 18 SX I/O BOWRIDER




## MODEL FEATURES - STANDARD

**Beverage holders**, coolie cup  
**Engine controls**, Uflex® single-lever, w/built-in trim switch  
**Engine cover**, reinforced fiberglass construction w/lounge pad  
**Ice chest**, Igloo® 11 qt. portable  
**Instrumentation**: speedometer, tachometer, voltmeter, fuel, oil pressure, temperature and trim gauge in non-glare dash console  
**Sleeper seats**, 5-position, convert to lounges  
**Seats**, aft, convert to sun lounge storage compartments under  
**Seats**, bow area w/storage under  
**Ski tow eye**, stainless steel, reinforced, through-bolted  
**Stereo**, AM-FM cassette w/all-weather speakers  
**Storage shelves**, under dash consoles  
**Stowage compartments**, upper and lower side panels  
**Stowage locker**, in-floor ventilated, 78" length, w/removable carpeting

## HARDWARE &amp; EQUIPMENT - STANDARD

**Bilge blower**, 12v electric  
**Bilge pump**, 400 gph w/automatic float switch  
**Boarding ladder**, aft, stainless steel retractable  
**Bow eye**, stainless steel  
**Cleats**, Perko®, through-bolted, life-time warranty  
**Fuel fill**, aft  
**Fuel tank**, non-corrosive, keel-mounted  
**Horn**, 12v, electric flush mount  
**Ignition safety** interlock switch w/lanyard  
**Navigation lights**, fwd w/removable anchor light aft  
**Railings**, stainless steel, through-bolted  
**Steering system**, Teleflex® rack & pinion  
**Steering wheel**, Momo® w/padded grip  
**Swim platform**, integrated  
**Trailer tie-down eyes**, stainless steel, through-bolted  
**Urethane foam flotation**  
**Windshield system**, Aldon Opti-view®, tempered safety glass, anodized aluminum frame

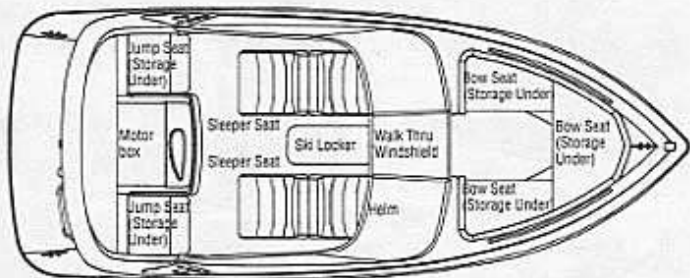

| SPECIFICATIONS      | STANDARD      | METRIC      |
|---------------------|---------------|-------------|
| Centerline          | 18' 0"        | 5.49 m      |
| Beam                | 7' 2"         | 2.18 m      |
| Dry weight          | 1900 lbs.     | 862 kg      |
| Fuel cap            | 20 gal        | 76 L        |
| Draft: drive up     | 13"           | .33 m       |
| Draft: drive down   | 28"           | .71 m       |
| Bridge clearance    | 3' 7"         | 1.09 m      |
| Length on trailer   | 20' 6"        | 6.99 m      |
| Width on trailer    | 7' 9"         | 2.36 m      |
| Deadrise            | 18°           | 18°         |
| Max weight capacity | 1250 lbs.     | 567 kg      |
| Persons             | 6 or 900 lbs. | 6 or 408 kg |

## POWER (See Page 58)

Volvo® 2.3 L

## PERFORMANCE DATA

|               |                     |
|---------------|---------------------|
| TIME TO PLANE | 3.5 SECONDS         |
| TOP SPEED     | 43.5 MPH @ 5000 RPM |
| CRUISE SPEED  | 27.3 MPH @ 3500 RPM |
| CRUISE RANGE  | 104 MILES           |

## CANVAS (See Page 66)

Convertible top  
 Side curtains  
 Bow well cover  
 (Mooring cover optional from dealer)

## NOTES

---



---



---



---



---



---