




180 FISHERMAN

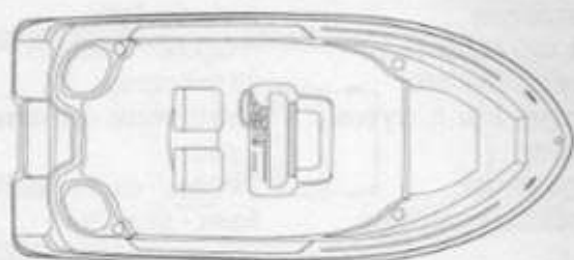

L.O.A.	18'0" (5.48m)
Beam	7'11" (2.41m)
Dry weight w/Yamaha O/B (approx.)	2700 lbs. (1225kg)
Fuel capacity (Gas)	49 gal. (185.5L)
Max power @ prop	150 HP (111.9kw)
Shaft length	20' (.51m)
Deadrise	20°
Draft: up (approx.)	15" (.38m)
Draft: down (approx.)	32" (.81m)
Transom height	20"
Bridge clearance w/o top	4'5" (1.37m)
Bridge clearance w/bimini top	6'7" (2.01m)

KEY SALES FEATURES

- Fiberglass foam filled stringers - composite transom
- Large console sits 2 comfortably behind windscreen
 - Deep V-hull and wide beam creates a stable fishing platform and soft ride
 - Location for trolling motor
 - Cooler storage under forward console seat
 - Easy access for batteries
- Complies with Coast Guard safety regulations
- 10-Year structural hull warranty - transferable
- NMMA Certified • Liner - fiberglass - diamond pattern skid resistant for easy maintenance

STANDARD EQUIPMENT

HULL & DECK

Anchor locker
Bow and stern eyes - stainless steel
Cleats - stainless steel
Foam flotation-level
Ladder - 2 step swing down
Rod holders (4) - stainless steel flush mount
Rod racks - under gunwale - port/stbd
Stainless steel rails
Swim platform - integrated
Windscreen - plexiglass

COCKPIT

Aft seat cushions (NEW)
Beverage holders
Cockpit overboard scuppers
Foot rest - built-in at helm
Forward bow storage
Forward console seat with cushions and under floor storage
Livewell - 27 gal. with light

Raw water washdown
Seats - pedestal with cushions - port/stbd

MECHANICAL

Accessory plug - 12V
Bilge pump with auto float switch
Compass
Horn
Ignition - safety interlock system with lanyard
Instrumentation - tachometer, fuel, volts, water pressure, trim, and speedometer
Navigation lights
* Propeller - aluminum
Steering - non-feedback
Steering wheel - stainless steel
Switches - weather resistant
Trailer - galvanized

* Drop shipped engines only

OPTIONAL EQUIPMENT

Bimini top - Sunbrella
Canada certification
CE certification (for export only)
Cradle
**Hydraulic tilt steering
***Leaning post seat with storage and rod holders
Pre-rig for Merc, Yamaha, Evinrude, Johnson, Honda and Suzuki
(Recommended HP: 90 hp to 150 hp, check for engine availability)
Stainless steel rubrail insert
Trailer - aluminum

* Tournament Edition Blue (NEW)
Custom graphics
Custom aluminum steering wheel w/knob (NEW)
Stainless steel thru hulls (NEW)
* Tournament Edition Gold (NEW)
Custom graphics
Custom aluminum steering wheel w/knob (NEW)
Stainless steel thru hulls (NEW)
** Tilt hydraulic steering std on 150 HP
*** Tilt wheel not available with lean post seat
* Note: Items in Packages cannot be ordered individually.

ENGINE OPTIONS

Merc 115 ELPTO Saltwater
Merc 150 L Saltwater Classic
Merc 150 L Optimax Saltwater (DIG)
Johnson 90
Johnson 115
Evinrude 115 FFI
Johnson 150
Suzuki DF 115

Yamaha 115 TLRB
Yamaha F 115 TLRB
Yamaha V 150 TLRB

PERFORMANCE DATA - Yamaha F115 4-Stroke

Time to Plane	4.25 Seconds
Top Speed	41.9 MPH @ 6000 RPM
Cruise Speed	28.2 MPH @ 4500 RPM
Cruise Range	312 Miles

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted. This test done with clean bottom, no bottom paint and light to average load.

Specifications, options, and equipment are subject to change without notice.