




180 SPORTSMAN O/B

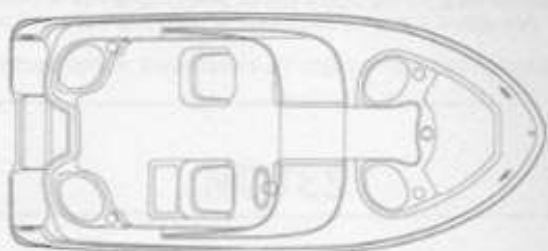

L.O.A.	18'0" (5.49m)
Beam	7'11" (2.4m)
Dry weight w/F115 4-Stroke O/B (approx.)	2500 lbs. (1134kg)
Fuel capacity (Gas)	49 gal. (185L)
Max power @ prop	150 HP (111.9kw)
Shaft length	20" (.51M)
Deadrise	20°
Draft: up (approx.)	15" (.38m)
Draft: down (approx.)	32" (.81m)
Transom height	20"
Bridge clearance w/o top	4'6" (1.37m)
Bridge clearance w/bimini top	6'7" (2.01m)

KEY SALES FEATURES

- Versatile bowrider suited for fishing, skiing, or diving
 - Symmetrical consoles port and starboard with storage
 - Ski and kneeboard storage
 - Location for forward trolling motor
- Composite transom with foam filled fiberglass stringer system
- Full height transom
- Insulated baitwell
- Dash forward hull and wide beam for stable fishing platform and soft ride
- Insulated cooler with overboard drain
- 10-year structural hull warranty - transferable
- Complies with Coast Guard safety regulations
- NMMA Certified
- Liner - fiberglass - diamond pattern skid resistant for easy maintenance

STANDARD EQUIPMENT

HULL & DECK

Anchor locker
Bow and stern eyes - stainless steel
Cleats - stainless steel
Foam flotation-level
Hardware - stainless steel
Ladder - 2 step swing down
Stainless steel rails
Storage locker - in floor ventilation
Swim platform - integrated
Windshield tinted with tempered glass - walk-thru

COCKPIT

Aft seat - port/stbd with cushion
Beverage holders (6)
Cockpit overboard scuppers
Courtesy lights
Foot rest - built-in at helm
Forward bow storage
Forward console - port/stbd seats with cushions
Portside helm with built-in cooler - 56 qt.

Stbd helm seat with livewell and portside pedestal seat with cushion
Stbd helm storage
MECHANICAL
Accessory plug - 12V
Bilge pump with auto float switch
Fuel tank - non-corrosive - built-in
Horn - electric flush mount
Ignition - safety interlock system with lanyard
Instrumentation - tachometer, fuel, volts, water pressure, trim, and speedometer
Navigation lights
* Propeller - aluminum
Steering - tilt
Steering wheel - stainless steel
Switches - weather resistant
Trailer - galvanized
Tube chase for wiring trolling motor
* Drop shipped engines only

OPTIONAL EQUIPMENT

Bow and cockpit cover - Sunbrella
Bimini top - Sunbrella
Canada certification
Carpet - snap-in (available with fresh and salt water fish packages or ski package)
CE certification (for export only)
Cockpit bolsters - port/stbd
Cradle
* Hydraulic tilt steering
Pre-rig for Merc, Yamaha, Evinrude, Johnson, Honda and Suzuki (Recommended HP: 90 hp to 150 hp, check for engine availability)
Side and aft curtains and windshield connector
Stainless steel rubrail insert
Trailer - aluminum
* **Tournament Edition Blue (New)**
Cockpit bolsters - port/stbd
Custom graphics
Custom aluminum steering wheel w/knob (NEW)
Stainless steel thru hulls
* **Tournament Edition Gold (NEW)**
Cockpit bolsters - port/stbd
Custom graphics
Custom aluminum steering wheel w/knob (NEW)
Stainless steel thru hulls

Trolling Motor Connection Package (NEW)

Trolling motor harness and plug panel
Dual battery trays-port console
Custom bow light
* **Freshwater Fish Package**
2 rod holders
Bow casting seat
Port side pedestal seat with fish box
Rod boxes port/stbd
* **Saltwater Fish Package**
2 rod holders
Compass
Port side pedestal seat with fish box
Raw water washdown
Rod boxes port/stbd
* **Ski Package**
Aft filler seat with cushion
Bow cushion with backrest
Port lounge seat
Ski pylon
Stereo AM/FM CD player with 2 speakers
** Tilt hydraulic steering std on 150 HP
* Note: Items in Packages cannot be ordered individually.

ENGINE OPTIONS

Merc 115 ELPTO Saltwater
Merc 150 L Saltwater Classic
Merc 150 L Optimax Saltwater (DIG)
Johnson 115
Evinrude 115 FFI
Johnson 150

Yamaha 115 TLRB
Yamaha F 115 TLRB
Yamaha V 150 TLRB
Suzuki DF 115

PERFORMANCE DATA - Yamaha F115

Time to Plane	4.25 Seconds
Top Speed	41.9 MPH @ 6000 RPM
Cruise Speed	24.1 MPH @ 4000 RPM
Cruise Range	274 Miles

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted. This test done with clean bottom, no bottom paint and light to average load.

Specifications, options, and equipment are subject to change without notice.