




210 CCF

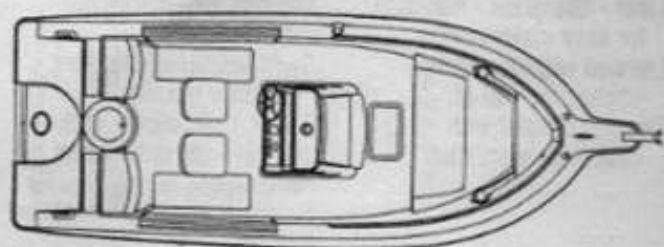

L.O.A.	21'9" (6.63m)
Hull length	20'3" (6.17m)
Beam	8'3" (2.51m)
Dry weight w/135 O/B (approx.)	3200 lbs. (1451.51kg)
Fuel capacity (Gas)	75 gal. (189.25L)
Max power @ prop	225 HP (167.8kw)
Deadrise	19°
Transom angle	15°
Draft: up	15" (.40m)
Draft: down	31" (.79m)
Bridge clearance without top	5'6" (1.67m)
Bridge clearance with T-top	8'4" (2.54m)

KEY SALES FEATURES

- Bow pulpit with roller and deck pipe
- Foam filled fiberglass stringer system - composite transom
- Integrated swim platform • NMMA Certification
- 5-year structural hull warranty - transferable
- All stainless steel deck hardware thru-bolted
- Insulated fish boxes port and starboard with overboard drains • 27 gallon lighted round baitwell
- Multiple storage areas

STANDARD EQUIPMENT

HULL & DECK

Anchor locker
Bow pulpit with roller and deck pipe
Bow and transom eyes - stainless steel
Cleats - stainless steel
Composite transom
Fiberglass stringers - foam filled
Rails - stainless steel
Rod holders - (2 ea.) deck mount
Swim platform - integrated
Transom - full height

COCKPIT

Beverage holders (4)
Cockpit - self draining
Fish boxes (11 gal. ea.) - port/stbd - insulated w/overboard drain
Forward console seat w/ insulated cooler (100 gal.)
Liner - fiberglass - non-skid for easy maintenance
Livewell - 27 gal. w/light
Pedestal seats - port/stbd w/cushions
Gunwale caps w/rod storage port/stbd and toe kick
Large insulated storage forward of console - 76 gal.

Large insulated storage in forward casting platform - 100 gal.

MECHANICAL

Accessory plug - 12V
Bilge pump w/auto float switch
Compass
Electronics box - lockable
Horn
Ignition - interlock system with lanyard
Instrumentation - tachometer, fuel, volts, water pressure, trim
Navigation lights
Power for electronics at helm
Propeller - stainless steel (N/A on 115 OMC SPL)
**Steering - non-feedback
Steering wheel padded/stainless steel
Switches/circuit breakers - weather resistant
* Note: Systems warning gauge not available on Merc 115 Offshore, Merc 135 Offshore, Merc 150 Offshore, Merc 200 Offshore

** Hydraulic steering required on installations above 150 HP

OPTIONAL EQUIPMENT

Bimini Top - Sunbrella with windshield connector
Heavy duty dive ladder
** Hydraulic steering
Pre-rig for OMC
T-top w/spreader light, rod holders and electrical box
Trim Tabs
* **Optional Package 3**
Battery switch - dual
Heavy duty dive ladder
Raw water washdown

* **Optional Package 5**

Bow cushion
Cockpit bolsters - port/stbd
Aft bolsters - port/stbd
Aft seats - port/stbd

* Note: Items in Optional Packages cannot be ordered individually.

** Required on installations above 150 HP

ENGINE OPTIONS

Merc 115 Offshore
Merc 135 Offshore
** Merc 135 Optimax Offshore DFI
* Merc 150 Offshore
** Merc 150 Optimax Offshore DFI
Merc 200 Offshore

OMC 115 Ocean
** OMC 115 Ocean-FFI
OMC 115 SPL
OMC 130 TLEU
* OMC 150 Ocean
** OMC 150 Ocean-FFI
OMC 175 Ocean
** OMC 175 Ocean-FFI
OMC 200 Ocean
OMC 225 Ocean

* Factory installed engine
** As available

Specifications, options, and equipment are subject to change without notice.

PERFORMANCE DATA - OMC 115 O/B

Time to Plane	4.03 Seconds
Top Speed	34.0 MPH @ 5420 RPM
Cruise Speed	24.5 MPH @ 4000 RPM
Cruise Range	216 Miles
Propeller Size	15" X 17" SST

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s).
Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted.