


240 CCF

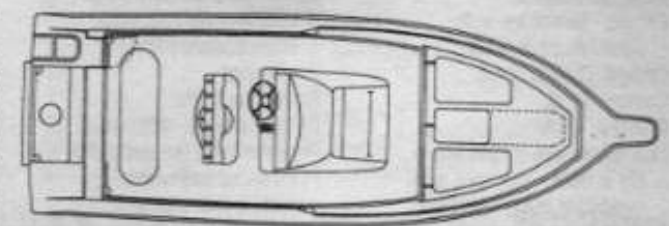

L.O.A. w/ pulpit	25' 5" (7.75m)
Hull length	24' 0" (7.32m)
Beam	8' 6" (2.59m)
Dry weight w/200 O/B (approx.)	4300 lbs. (1950.48kg)
Fuel capacity (Gas)	134 gal. (507.19L)
Max power @ prop	300 HP (223.71kw)
Deadrise	18°
Draft: down	32" (.82m)
Bridge clearance without top	5' 9" (1.80m)
Bridge clearance with T-top	7' 11" (2.17m)

KEY SALES FEATURES

- Deluxe leaning post seat with livewell - 148 qt. capacity and raw water washdown
- All stainless steel deck hardware thru-bolted
- Well-Tech transom - integrated O/B bracket and swim platform • NMMA Certification
- 5-year structural hull warranty - transferable
- CE Certifiable (for export) • Fish box - 60" insulated with overboard drain and hinged lid
- Foam filled, fiberglass encapsulated stringer system

STANDARD EQUIPMENT

HULL & DECK

- Anchor locker
 - Bow pulpit with roller and deck pipe
 - Bow and transom eyes - stainless steel
 - Bow rail - stainless steel - one piece welded
 - Cleats - stainless steel
 - Rod holders - (2pr) deck mount
 - Rod racks - under gunwale - port/stbd
 - Swim platform - integrated - with flush mounted swim ladder
 - Transom - full height includes transom door
- #### COCKPIT
- Beverage holders
 - Courtesy lights
 - Fish boxes - 60" - insulated with overboard drain and hinged lid
 - Forward console seat opening
 - Leaning post with rod holders (3)
 - Liner - fiberglass - non-skid for easy maintenance

- Livewell with raw water washdown - lighted - 148 qt. capacity
 - Rigging station - cutting board - watertight tackle box
 - Rod holders - gunnel mount (4)
- #### MECHANICAL
- Accessory plug - 12V
 - Bilge pump with auto float switch
 - Compass
 - Electronics box - lockable
 - Horn
 - Ignition - safety interlock system with lanyard
 - Instrumentation - tachometer, fuel, volts, water pressure, trim, warning*
 - Navigation lights
 - Oil tank storage with remote fill
 - Power at helm for electronics
 - Propeller - stainless steel
 - Steering - hydraulic
 - Steering wheel - padded stainless steel
 - Switches/circuit breakers - weather resistant

*Note: Systems warning gauge not available on Twin Merc 150 Offshore

OPTIONAL EQUIPMENT

- Bimini top - Sunbrella
 - Cockpit bolsters
 - Console cover (n/a with T-top)
 - Pre-rig for single OMC
 - Seats - Pedestal with cushions - port/stbd
 - Transom shower - freshwater (8 gal)
 - T-top with spreader light, electronic box and rod holders
- #### * Optional Package 6
- Battery switch - dual
 - Trim tabs

- * Optional Package 7**
- Trim tabs
- (Twin) Two dual battery switches
- * Optional Package 11**
- Aft seat - removable (requires cockpit bolsters)
- Head - self contained
- Stereo - AM/FM cassette - 2 speakers

* Note: Items in Optional Packages cannot be ordered individually.

ENGINE OPTIONS

- * SGL Merc 225 Offshore
- * SGL Merc 225 EFI Offshore
- * Twin Merc 150 Offshore
- ** Twin Merc 150 Optimax Offshore-DFI
- * SGL OMC Ocean 225
- Twin OMC Ocean 150
- ** Twin OMC Ocean 150-FFI

All twin engines factory installed

* Factory installed engine
** As available

Specifications, options, and equipment are subject to change without notice.

PERFORMANCE DATA - Merc 225 O/B

Time to Plane	3.41 Seconds
Top Speed	48.1 MPH @ 5700 RPM
Cruise Speed	33.5 MPH @ 4000 RPM
Cruise Range	330 Miles
Propeller Size	15 1/2" X 17" Mirage

Performance and fuel consumption will vary and be affected by water and weather conditions, altitude, load and condition of boat, engine and propeller(s). Cruise range based on 95% of fuel capacity. All data is illustrative and is not warranted.