




## 270 COASTAL O/B

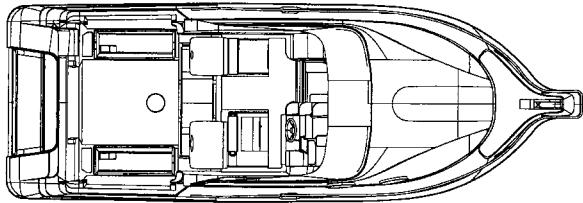

L.O.A. w/pulpit	28'1" (8.56m)
Hull length	25'10" (7.87m)
Beam	9'9" (2.97m)
Dry weight w/ Yamaha F200 4-Stroke O/B (approx.)	7253 lbs. (3290kg)*
Fuel capacity (Gas)	188 gal. (712L)
Water capacity	27 gal. (102L)
Holding tank capacity	11 gal. (.42L)
Max power @ prop	500 HP (373kw)
Shaft length	25" (.64m)
Deadrise	21°
Draft: up (approx.)	19" (.48m)
Draft: down (approx.)	34" (.86 m)
Bridge clearance w/o top	7'1" (2.16m)
Bridge clearance w/hardtop	9'1" (2.77m)
Bridge clearance w/bimini top	8'4" (2.54m)
Headroom	6'4" (1.93m)
Sleeping Capacity	4

\* Dry weights may vary with engine and options

## KEY SALES FEATURES

- Full height transom with door • Modular port and starboard helm seating with storage • Cruiser style cabin amenities • Insulated livewell and bait prep station
- Fiberglass molded steps on helm for easy access to foredeck
- Integrated swim platform with boarding ladder • Insulated fish boxes with overboard pumpout • Composite transom with foam filled fiberglass stringer system • Complies with Coast Guard safety regulations • 10-year structural hull warranty - transferable • NMMA Yacht Certification
- Liner - fiberglass - diamond pattern skid resistant for easy maintenance • Genmar FirstMate+™ 24/7/365 coverage

## STANDARD EQUIPMENT

### HULL & DECK

Bow pulpit with anchor roller/chute and deck pipe  
Bow and stern eyes - stainless steel  
Cleats - stainless steel  
Deck hatch opening with screen  
Heavy duty dive ladder - removable  
Heavy duty rub rail with stainless steel insert  
Port lights (4) with stainless steel trim rings - opening with screens  
Rod holders - gunnel mount (2) - stainless steel with cap

### Rope locker

Stainless steel rails  
Stainless steel thru hulls  
Swim platform - integrated  
Transom - full height with transom door

Windshield - curved tempered glass - walk-thru door

### COCKPIT

Aft seat - fold out  
Beverage holders  
Chart storage tube  
Cockpit bolsters - port/stbd/aft  
Cockpit overboard scuppers  
Courtesy lights  
Entry light switch at transom  
Fish boxes (2) - with lift assist and overboard pumpout

### Floor storage

Helm seating module - 2 position helm seat, lighted and insulated livewell with viewing window, below seat storage, beverage holders  
Port seating module - single seat with storage, sink with hinged lid and fresh water system, cutting board, and beverage holder

Raw water washdown  
Rigging station - cutting board  
Rod racks - under gunwale - port/stbd

### CABIN

AC/DC panel  
Cabin door - sliding - lockable  
Carpet - snap in  
Designer fabrics  
Dinette table - converts to full V-berth  
Duplex outlet - GFI protected  
Forward V-berth with cushions  
Galley with Granulon™ counterbp and molded-in sink

### Hanging locker

Lighting - 12V  
Liner - full fiberglass  
Microwave oven  
Mid cabin berth  
Refrigerator - dual voltage 110V w/15 amp converter - GFI protected

Sirius Satellite Radio System (new) - Clarion AM/FM CD player, Sirius Satellite Receiver and antenna, 4 speakers, digital remote control

Stove - single burner - alcohol/electric  
Woodgrain cabinets

### HEAD

Duplex - GFI protected  
Hand-held shower, molded fiberglass sink and vanity with Granulon™ countertop and storage  
SeaLand™ VacuFlush head with holding tank

### MECHANICAL

Accessory plug - 12V  
Battery switch - dual with trays  
Bilge pumps (2) with auto float switch

Carbon monoxide detector  
Compass  
Genmar FirstMate+™ GPS Monitoring and Telematics security

Horn  
Ignition - safety interlock with lanyard

Instrumentation with dimmer switch - tachometer, fuel, volts, water pressure, trim, warning, \* backlit switch panel  
Navigation lights

Oil tank storage with remote fill (2-stroke only)  
Power at helm for electronics  
Pressurized fresh water system with transom shower

\*\*Propeller - stainless steel

Shore power - 15 amp with 50' cord  
Steering - tilt hydraulic  
Steering wheel - aluminum with knob

### Trim Tabs

Windshield wiper - stbd

\* with specific engines

\*\* with preferred Twin 225 HP factory rigged engines and drop shipped only

## COLOR OPTIONS

### TOURNAMENT EDITION COLOR

#### OPTIONS

##### **White hullside gelcoat:**

Blue Graphics - Canvas Color  
Mediterranean Blue Tweed  
Gold Graphics - Canvas color  
Linen Tweed

### TOURNAMENT EDITION

#### HULLSIDE GELCOAT COLOR

#### OPTIONS

Bahama Blue - canvas color  
Charcoal Tweed  
Fighting Lady Yellow - canvas  
color Charcoal Tweed  
Midnite Blue - canvas color  
Mediterranean Blue Tweed  
Seafoam Green - canvas color  
Charcoal Tweed

#### CABIN FABRIC SELECTION

Bahama Blue  
Desert Sand

## NOTES

## OPTIONAL EQUIPMENT

Air conditioner 5000 BTU  
reverse cycle with heat and  
shore power cord

CE Certification (for Export only)

Cockpit snap-in carpet

Dive tank storage racks

Dockside water connection  
includes hot water for galley,  
head and transom shower  
Extra fuel tank - 70 gal. (not  
available with generator)

Generator 5kw gas with sound  
shield and bilge blower (not  
available with optional fuel tank)

Hardtop, fiberglass with  
finished liner, spreader  
light, rod holders, full  
canvas enclosure and port  
windshield wiper

Overboard discharge for  
VacuFlush head

Pre-rig for Merc, Yamaha,  
Evinrude, and Johnson

(Recommended HP: Tw 150 hp to Tw  
250 hp, check for engine availability)

Remote spotlight - 5"

SA option

Windlass with 150' rope/chain  
combo and electric up/down  
switches, lanyard and anchor

#### **\* Bimini Top Package**

Bimini top - Premium

Side and drop curtain with  
windshield connector

\* Note: Items in Packages cannot be  
ordered individually.

## ENGINE OPTIONS

Tw Merc 200 XLOptimax  
Saltwater (DIG)

Tw Evinrude 200 FXP

Tw Evinrude 225 FXP

Tw Honda BF 225 - 4-Stroke

Tw Yamaha Z 200 TXR

Tw Yamaha F 200 TXR

Tw Yamaha F 225 TXR

## PERFORMANCE DATA - Tw Yamaha F200 4-stroke

Time to Plane

3.8 Seconds

44.8 MPH @ 6000 RPM

33.3 MPH @ 4000 RPM

319 Range Miles

Performance and fuel consumption will vary and be affected by  
water and weather conditions, altitude, load and condition of boat,  
engine and propeller(s). All data is illustrative and is not  
warranted. This test done with clean bottom, no bottom paint and  
light to average load.

Specifications, options, and equipment are subject to change  
without notice.